



MASSEY FERGUSON

MF 1840


Centre-line small rectangular baler




FROM MASSEY FERGUSON



Page 06
The MF 1840 –
A Real Investment

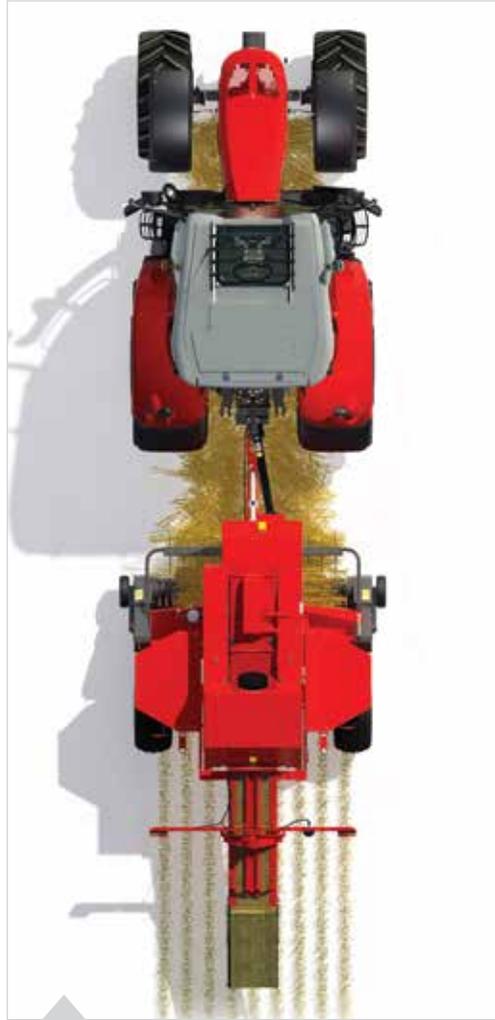

Page 08
The unique in-line
conventional baler

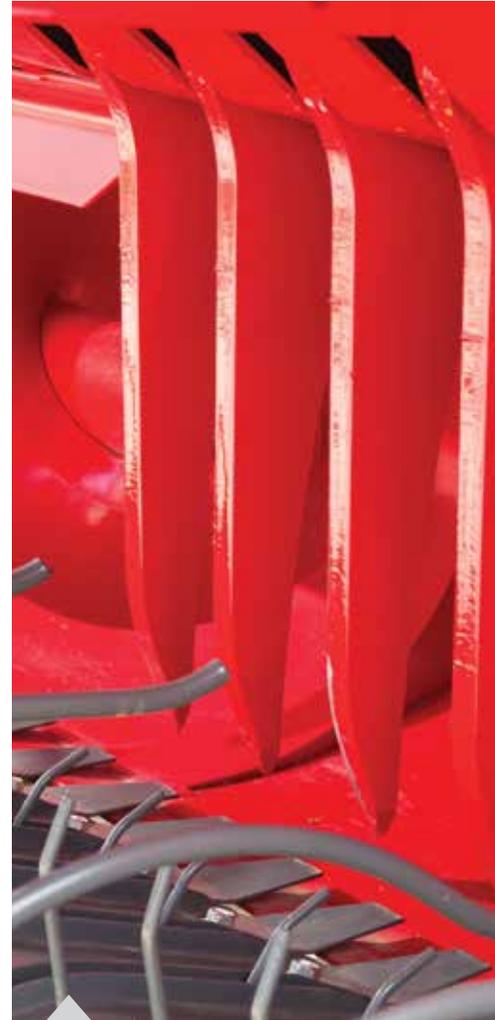

Page 11
Feeding



Page 12
Superior Knotters

Contents

- 06 The MF 1840 – A Real Investment
- 08 The unique in-line conventional baler
- 10 Pick-up
- 11 Feeding
- 12 Superior Knotters
- 13 OptiForm™ Bale Chamber
- 14 Accessories
- 15 Total Support. There when you need it.
- 16 Specifications
- 18 Machine Overview



Page 13
OptiForm™ Bale Chamber



Page 16
Specifications



Hesston, Kansas

 | Leading the way in advanced hay and forage technology

In 1991 AGCO purchased the Hesston Corporation, a leading North American brand of hay tools and a 50 per cent participation in the manufacturing joint venture known as Hay and Forage Industries (HFI). Then in 2000 AGCO completed the purchase of Hay and Forage Industries in Hesston, Kansas, solidifying its planned strategy to achieve efficient manufacturing rationalisation by consolidating major operations in North America.

With hundreds of patents to its credit, Hesston® has been the hay and forage innovator since 1955, when the company developed the first commercially available self-propelled windrower. Other industry 'firsts' have included the first hydrostatic windrower, the first centre-pivot mower-conditioner and the first big rectangular baler - which had nearly 50 individual patents of its own.

Today, products built in Hesston continue to lead the way in advanced hay and forage technology. The factory offers mowing systems, conventional, round and large square balers and a range of self-propelled windrowers. These are built alongside the innovative rotary combines marketed throughout the world.

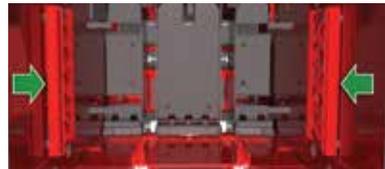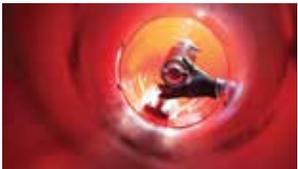



The MF 1840: A real investment

The MF 1840 'centre-line' baler goes from strength-to-strength thanks to its popular design and well-established reputation as the perfect small, square baler. Whether you bale a few hectares a year for your own livestock, or produce thousands of bales annually in a commercial operation, the MF 1840 will fit your requirements and budget perfectly.

	MF1840
Bale size	Width 457 mm x Height 356 mm 14" x 18"
Bale length	up to 1300 mm
Crops	Straw, hay, low moisture haylage
Power requirement	Recommended minimum 50 PTO hp
Working pick-up width	1.9 m
Density control	Manual springs or automatic hydraulic



Designed and built in our factory in Hesston, Kansas, the MF 1840 baler has a steadfast reputation as a sturdy and reliable partner for 'fuss-free' baling. For years the MF 1839 has proved itself to be an excellent investment, for small or large farms, contractors and equine businesses alike. And thanks to its simple operation and consistent design, this simple 'centre-line' baler will quickly become a worthwhile investment for your business.

The latest MF 1840 baler now offers big increases in feeding ability, is robust and durable with a low power requirement, ensuring years of reliable service.


This 'centre-line' small rectangular baler has a working pick-up width of 1.9 m. The wide, heavy-duty pick-up is ideal for high usage or contracting. It is guaranteed to produce consistent, densely packed bales of hay or straw that are the right size for easy handling or feeding and the right density for efficient storage and transport.

Make the right business choice with an MF 1840 baler.

The benefits of in-line baling

Easy on the road, easy in the field.

You'll notice the first advantage before reaching the field. Even though the MF 1840 features a wide pick-up, transport width is exceptionally narrow because of the in-line design allowing easy access to narrow lanes and awkward gateways. And when you get to the field, there is no need to manhandle the baler from a 'transport' position to a 'work' position – you just lower the pick-up and start baling.

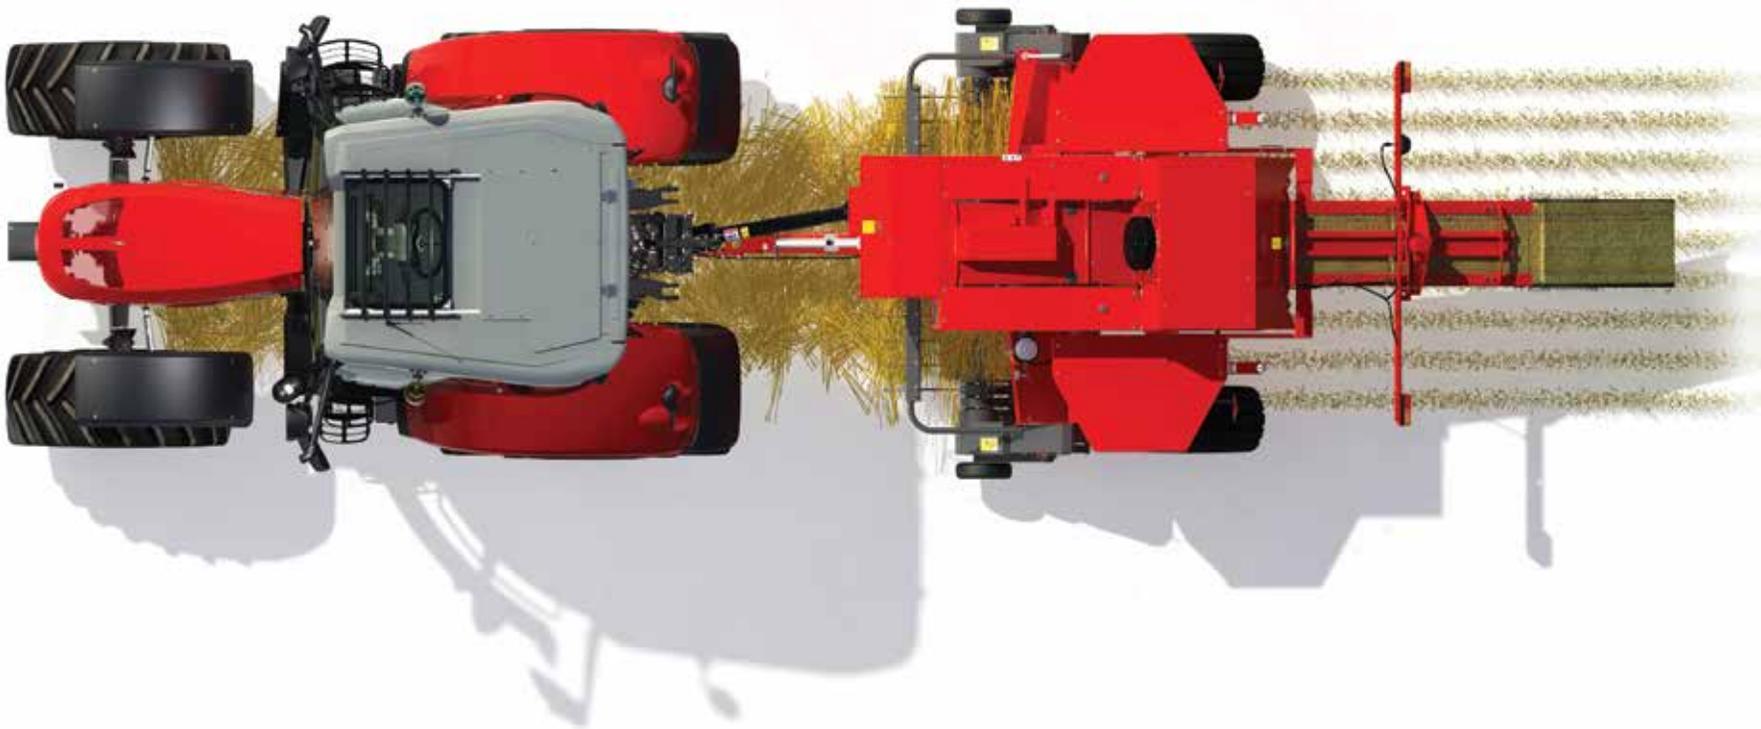

In-line design

The unique centre-line construction is designed to run in-line directly behind the tractor for unrivalled convenience and field efficiency. In addition it also gives you better weight distribution and reduces ground compaction.

Field and transport positions are one and the same. You never have to move bales out of the way when opening up a field or jockey through gateways. The MF 1840 has a narrow class leading overall transport width of 2.6 m.

The wide pick-up with centering augers increases baling capacity by evenly filling both sides of the bale chamber, creating uniform shaped bales. Dual pick-up gauge wheels help to maintain a healthy feed and avoid tine damage.

The low profile pick-up gently lifts the crop a short distance and feeds it directly into a pre-packer chamber, reducing crop damage and leaf loss. Improves crop feed and allows for an increased working speed.



Superior feeding

The 1.9 metre wide pick-up features a small diameter, 'low-profile' design with closely spaced tines ensuring that windrows are picked up cleanly with minimal disturbance and leaf loss. Gauge wheels, fitted as standard to either side, further help the pick-up to follow uneven ground contours, avoiding pick-up tine damage. The MF 1840 features a four tine bar pick-up for higher throughput.

As soon as the crop enters the pick-up, centring augers move the material into the centre of the baler. This ensures equal material distribution, improves crop feed and prevents the bale from becoming 'banana-shaped'.

The MF 1840 has new high capacity cross augers which give it massive feeding capability in heavy and even damp crops.

Crop is delivered into the pre-compression chamber using a completely new design of high capacity packer fork where it is pre-formed before entering the main bale chamber. This ensures a well-shaped bale is formed improving bale density and reducing stress on components giving improved baler durability.



Crop flow

The crop is delivered into the pre-compression chamber where the flake is pre-formed before entering the main chamber. This ensures a well-shaped bale is formed improving bale density and reducing stress on components giving improved baler durability. With a short stroke and high speed plunger, the pre-formed slice concept enables the baler to operate with high capacity, significantly reducing plunger bearing wear whilst generating a greater number of bales.



Crop is moved directly from the pick-up into a pre-forming chamber.



The packer fork then pushes the pre-formed flake up and into the bale chamber.

Rugged knotter design



The Hesston design of knotters are built to operate reliably season after season, with minimum fuss or maintenance. Their rugged design guarantees excellent reliability bale after bale, whether using high quality plastic or sisal twine.



An electric knotter fan is fitted as standard to the MF 1840 and ensures the knotter are kept clean and free from any debris build up during operation.



Air is drawn in from the front, flows across the knotters and out of the rear of the knotter cover.




The MF 1840 carries 10 balls of twine which is enough for the longest days work. The large dimension of each compartment allow 'super large' size twine spools to be used, enabling even more twine to be carried and therefore more bales produced per twine fill-up.

OptiForm bale chamber



To ensure superb bale shape in all conditions and maintain consistent density, the OptiForm bale chamber is 460 mm or 30% longer when compared to the previous MF 1839 baler.

To help maintain density in the toughest of conditions the bale chamber is also equipped with adjustable bale chamber resistance doors. These help to complement the pressure applied to the bale from the top and bottom density rails.

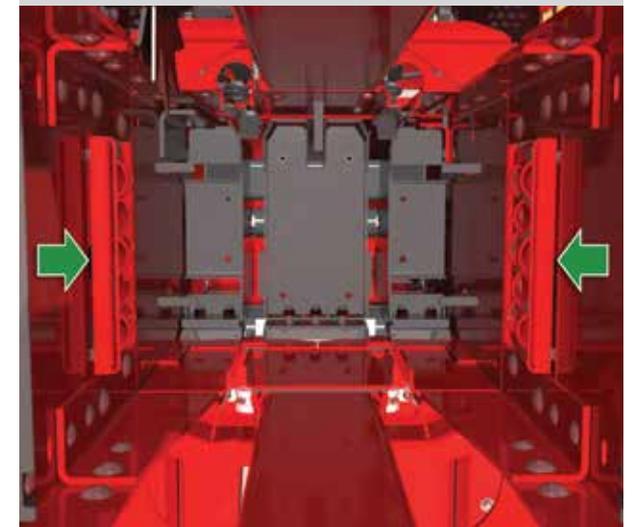

Accessories

Optional extras are available to increase productivity, make light work of tough jobs and even help your business to grow.



Adjustable length drawbar

A heavy duty drawbar is available for attaching bale accumulators and collectors easily and in the right place.



Hydraulic Bale Density Control

The system automatically regulates pressure on the pressure rails of the OptiForm bale chamber to ensure consistent bale density as conditions vary across the field and throughout the day.



System control

A small hydraulic reservoir, pump and pressure regulator at the front of the baler control the oil pressure in the density control rams.



Hydraulic density control ram

The control ram applies pressure to the top and bottom density rails.

Total Support.

There when you need it

Massey Ferguson is a true global brand with machines operating all over the world, and behind every Massey Ferguson machine is the powerful after sales support of AGCO's Customer Support organisation.

Industry benchmarking shows that AGCO offers customers world-class parts and service support, and this is never truer than in support of our harvest machinery both in and out of season.



Specifications as standard



5660 mm



2600 mm

		MF1840	
Bale Size			
Cross section (width x height)	mm	457 x 356	
Bale length (maximum)	mm	up to 1300	
Dimensions and Weights			
Overall width	mm	2600	
Transport width	mm	2600	
Overall length - less bale chute	mm	4760	
Overall length - with bale chute	mm	5660	
Overall height	mm	1700	
Weight	kg - approx.	1570	
Main Drive System			
Protection	Slip clutch, overrunning clutch and flywheel shear bolt		
Pick-up			
Lift/lower	Hydraulic		
Panel to panel - outside	mm	2264	
Effective working width	mm	1928	
Width - outside tine to outside tine	mm	1782	
Number of tine bars	4		
Number of double tines	56		
Drive protection	Torque limiter		
Auger diameter	mm	280	
Feeding System			
Packer	4 tine fork		
Protection	Shear bolt		
Plunger			
Speed	strokes/min	100	
Length of stroke	mm	550	
Number of plunger roller bearings	8		
Tying Mechanism			
Number / type of knotters	Two heavy duty single knotters		
Twine type	High quality plastic		
Capacity	10 spools		

		MF1840	
Tyres			
	Standard	31 x 13.5 - 15, 8-Ply	
Lights			
	CE road lighting	●	
Bale Density System			
	Standard	Spring loaded density control rails	
	Optional	Hydraulic density control	
Tractor Requirements			
	Recommended PTO horsepower	Hp /kW	50 /37
	PTO operating speed	rev/min	540
	PTO type	Type 1 13/8" 6 spline CV PTO shaft	
	Hydraulics spool valve requirement	min /rec	One
Variable Equipment			
	Automatic hydraulic bale density control	○	
	Adjustable draw bar / wagon hitch	○	

● = Standard


○ = Optional

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.



Built to meet the demands of the toughest season

- 01 Centre in-line design
- 02 High capacity plunger speed of 100 strokes per minute.
- 03 Knotter cleaning fan to prevent build-up of crop debris during operation.
- 04 Automatic hydraulic bale density control for consistent bale density as conditions change
- 05 OptiForm bale chamber for superb bale shape
- 06 Twine storage capacity for ten super large spools
- 07 Pump, reservoir and control for Automatic hydraulic bale density system
- 08 Wide high capacity low-profile pickup for gentle handling of hay crops with a 1.9m working width

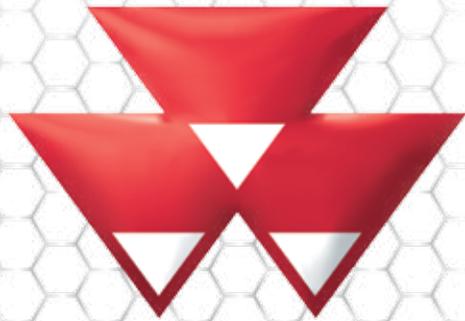

MASSEY FERGUSON

A world of experience. Working with you.



facebook.com/AGCOcorp
twitter.com/AGCOcorp
youtube.com/AGCOcorp
ustream.tv/channel/AGCOchat
blog.agcocorp.com



MASSEY FERGUSON is a worldwide brand of AGCO.
© AGCO Limited, 2012 | 15557/0913 | A-English/0913/3m



Responsible forest management

